

# OptiLam




## OptiLam Startup 160

### SINGLE HOT/COLD LAMINATOR


High-performance laminator suitable for industrial applications. It allows laminating, mounting and encapsulating prints, applying application tape and double-sided adhesive; compatible with all kinds of cold laminating film on the market.

### SUITABLE FOR:


- Printed exhibe materials
- Rigid displays
- Cardboard (packaging)
- Car wrapping
- Floor graphics
- Backlit displays
- Graphics for exhibitions, events
- Banner roll-up & Display pop-up
- Table displays
- Many more...

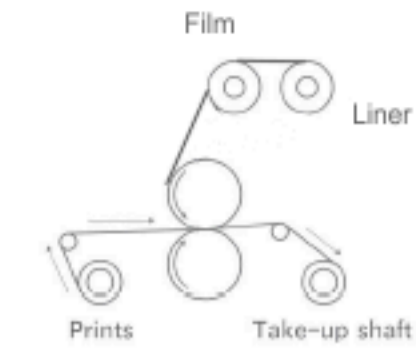

Liner film laminating

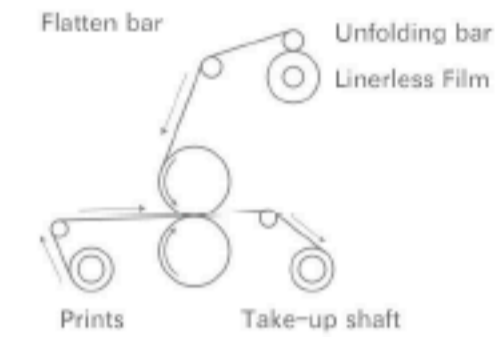

Linerless film laminating

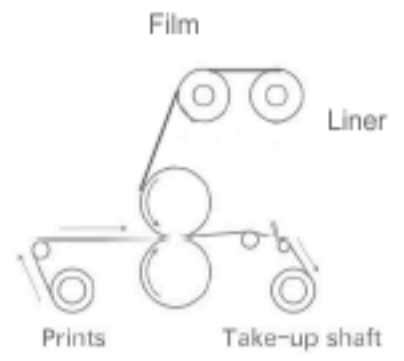

Laminating with cutting

- Professional sturdy and robust laminator designed to guarantee every day high quality results.
- 64"ALUMINUM SHAFTS for easy loading and unloading of the rolls.
- It can support big and heavy rolls with diameter up to 165mm thanks to the increased distance between rollers and support shafts.
- Heated upper roller with preset electronic temperature regulation - standard on Startup 160 model (Room~ 60°C)
- Ideal for mounting images on panels even of large dimensions, for incapsulations or for applying at the same time a plastic lm and a double-sided adhesive for mounting
- Intuitive set up parameters thanks to the user-friendly control panel.



Model	Startup160
Max laminating width	1620mm
Max laminating thickness	35mm
Max Speed	7m/min
Max temp	Room~60°C
Heating	Infrared
Preheating time	10~15min
Roller upgrade	Air cylinder
Power input	0.8~1.0kw/h
Volt	110/220V
Roller material	silicon
N.W	210kg

